



# CAMERAS AND VIDEO DETECTOR

## Indoor protection

## Outdoor protection



Description and reference

MotionViewer camera **ISMV200**

MotionViewer camera **IMV200 and IMVA200**

MotionViewer camera **OSMV210 and OSMV210**

MotionViewer camera **OMVC200 and OSMVC200**

Visual verification detector **OMV-VX200**

Application

- Colour and Video Live
- 4 years battery life
- 3 lithium batteries
- Protection rating: IP30 / IK04

- Colour video
- Wide angle
- 4 years battery life
- 2 lithium batteries

- Colour video
- IP54 weatherproof
- Tamper with an accelerometer captor
- 90° detection lens
- 3 spare lenses
- Masking kit
- Embedded I/O board
- 4 years battery life
- 4 lithium batteries
- Video Live (only **OSMV**)

- Colour video
- IP54 weatherproof
- Tamper with an accelerometer captor
- Vertical curtain lens
- 4 years battery life
- 4 lithium batteries
- Video Live (only **OSMVC**)

- Colour video
- IP65 weatherproof
- Tamper
- Double infrared detection
- 4 years battery life
- 3 lithium batteries

Temp Rating

-10°/+55°C

-10°/+40°C

-25°/+70°C

-25°/+70°C

-20°/+60°C



# DETECTION

## PIR detection

## Contacts

## Smoke



Description and reference

Indoor Motion Detector **IMD200 IMDA200 and IMDC200**

Indoor Door Contact **IDC200 and IDC210**

Indoor Door Contact **ICT200**

Smoke detector **ISD200**

Application

- 90° wide angle (IMD/IMDA) or vertical curtain (IMDC)
- 4 years battery life
- 1 lithium battery

- Exists in brown color IDC210
- 4 years battery life
- 1 lithium battery

- Hardware input
- 4 years battery life
- 1 lithium battery

- 1 year battery life
- 1 lithium battery



# ARMING

## Keypad

## Badge reader

## Keyfob

## Proximity tag



Description and reference

Keypads **XMA210 and XMB210**

Outdoor badge reader **BR250**

Keyfob **KF240**

Proximity tag **VT100**

Application

- Keypads with display backlighting
- Badge reader (only XMB)
- Panic button : 3 options
- Tamper detection
- 4 lithium batteries

- Outdoor badge reader
- IP65
- Tamper detection
- 3 lithium batteries
- Protection rating : IP65/IK07

- Compact, easy to use
- Arm specific areas as determined
- Siren and silent panic alarms
- 10 years battery life
- Interchangeable battery
- Exists in 1 panic button **KF210**


- Compatible with XL panel, XMB keypad and BR badge reader.



# SIRENS

## Indoor siren

## Outdoor siren



Description and reference

Indoor sirens **SE200 and SEV200**


Outdoor sirens **OSX200 and OSX210**

Application

- Sound level: 107 dBA @ 1 m (SE), 100 dBA @ 1m (SEV)
- Operating Temperature : -10°/+40°C

- Level 105 dBA @ 1 meter
- Operating Temperature : -25°/+70° C
- Protection rating : IP44D/IK07

WIRELESS ALARM SYSTEMS  
ALL RANGE

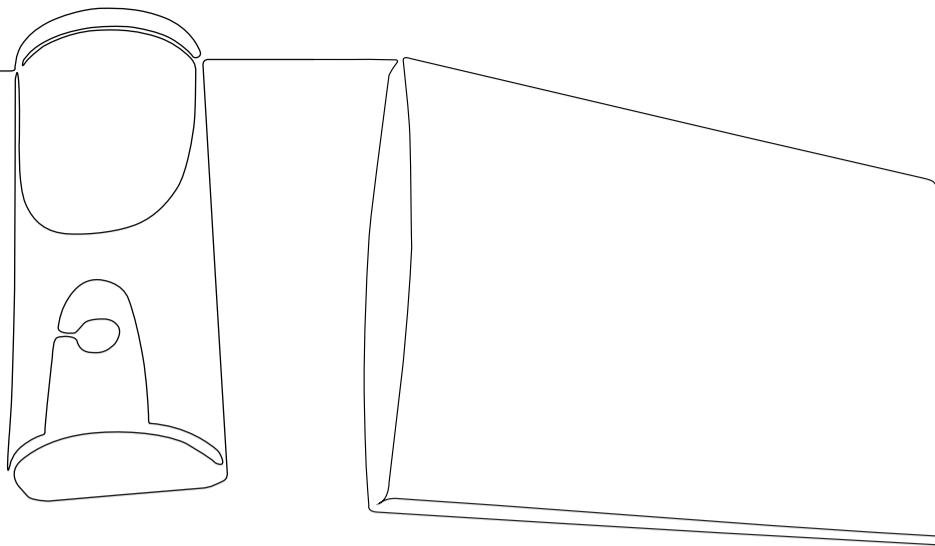

 PANELS

Residential and Pro


**W** Range

**X** Range

Outdoor  
**EXT** Range



Description and reference	Panel <b>W(x)10 WIP(x)20 WIP(x)10</b>	Panel <b>XL200GPRS</b>	Panel <b>XT-IP210</b>	Panel <b>XV-IP210</b>	Panel <b>XT0-IP210</b>
Keypad		✓			
Badge Reader		✓			
2 way-voice		✓		✓	
Wi-Fi	✓				
Siren	✓	✓			
GPRS Communication	✓	✓	✓	✓	✓
IP Transmission	✓		✓	✓	✓
External antennas GPRS & Radio			✓	✓	✓
Number of codes/tags	50	20	20	20	20
Number of devices	25	19	25	25	25
Hardware inputs	1		3	2	3
Hardware outputs	2		2	1	2
Temp Range	-10°/+40°C	-10°/+40°C	-10°/+40°C	-10°/+40°C	-25°/+70°C
Installation					Mounting Bracket included
Protection rating					IP65/IK06
Power supply	Mains power (WPS100) with battery back-up (included)	2 options : - 8 alkaline - 4 alkaline and power kit 7,2VDC	2 options: - back-up power supply with 4 alkaline batteries LR20 (mandatory for IP transmission) - stand-alone system powered by four lithium batteries LSH20 (only if GPRS mode)	Back-up power supply with 4 alkaline batteries LR20	2 options: - back-up power supply with 4 alkaline batteries LR20 (mandatory for IP transmission) - stand-alone system powered by four lithium batteries LSH20 (only if GPRS mode)



**VIDEOFIED**  
ULTIMATE SECURITY

**SALES OFFICE**

23, avenue du Général Leclerc  
92340 BOURG-LA-REINE / FRANCE  
E-Mail: emeasales@rsivideotech.com

[www.videofied.com](http://www.videofied.com)